

NPAS-20-1000-49-49S

20~1000MHz, 49dB, 49dBm

- Features:

 - * Small Size
 - * Low Power Consumption
- Applications:

 - * Wireless
 - * Transmitter
 - * Laboratory Test

Electrical

Frequency:	20~1000MHz
Gain:	49dB min.
Gain Flatness:	4±1dB max.
Input VSWR:	2 max.
Output Power (Psat):	49dBm min.
Input Power:	+10dBm max.
Spurious:	-65dBc max.
Harmonic:	10dBc max.
Voltage:	220V DC
Current:	7A max
Impedance:	50Ω

Mechanical


Size ^{*1} :	458*420*118mm
	18.032*16.535*4.646in
RF Connectors:	N Female

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings

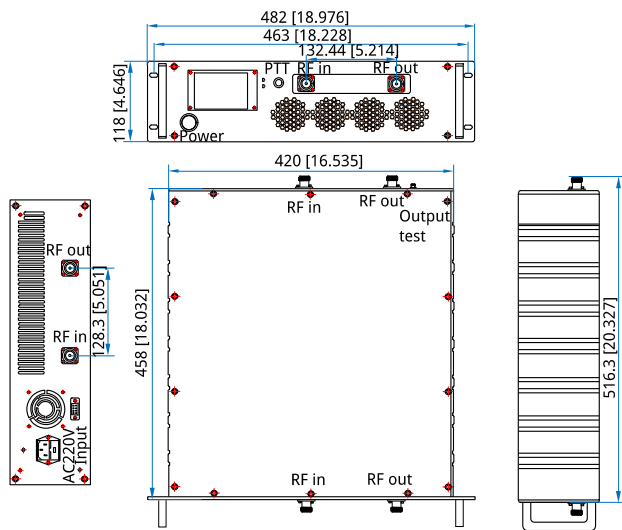

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

NPAS-20-1000-49-49S

Customization is available upon request.