

NPAS-20-2700-50-44S

0.02~2.7GHz, 50dB, 44dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	0.02~2.7GHz
Gain:	50dB min.
Gain Flatness:	±2.5dB typ.
Output Power (Psat):	44dBm min.
Harmonic:	-10dBc max.
Spurious:	-50dBc max.
VSWR:	2.2 typ.
Voltage:	220V AC
Current:	2A typ.


Mechanical

Size:	460*491*88mm
	18.11*19.331*3.465in
Size:	2U, depth 350mm
RF Connectors:	N Female

Environmental

Operating Temperature:	-20~+65°C
------------------------	-----------

Outline Drawings

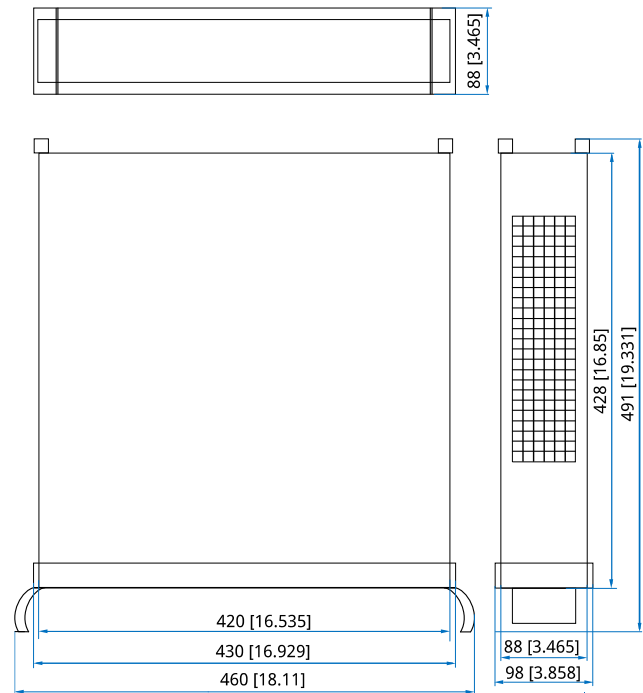

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NPAS-20-2700-50-44S

Customization is available upon request.