

NPAS-23000-25000-40-40S

23~25GHz, 40dB, 40dBm

- Features:

 - * Small Size
 - * Low Power Consumption
- Applications:

 - * Wireless
 - * Transmitter
 - * Laboratory Test

Electrical

Frequency:	23~25GHz
Power Gain:	40dB min.
Gain Flatness:	±2.0dB typ.
Output Power (Psat):	40dBm max.
Spurious:	-60dBc max.
Input Power:	+10dBm max.
Input VSWR:	1.8 typ.
Voltage:	220V AC
Impedance:	50Ω

Mechanical

Size*1:	274*238*50mm
	10.787*9.37*1.969in
Weight:	5kg max
RF Connectors:	2.92mm

Environmental


Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

How To Order

NPAS-23000-25000-40-40S

Customization is available upon request.

Outline Drawings

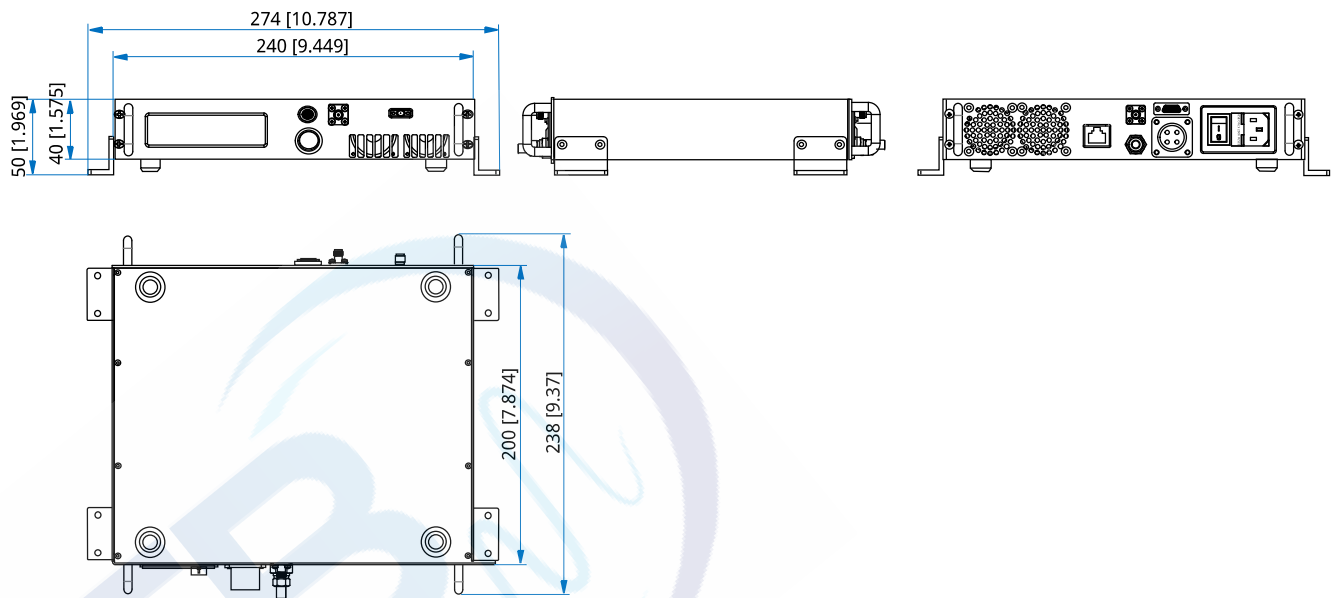

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]