

NPAS-24000-43000-30-30S

24~43GHz, 30dB, 30dBm

- Features:

 - * Small Size
 - * Low Power Consumption
- Applications:

 - * Wireless
 - * Transmitter
 - * Laboratory Test

Electrical

Frequency:	24~43GHz
Power Gain:	30dB min.
Intermodulation Rejection Ratio:	-40dBc@20dBm
Gain Flatness:	±3.0dB typ.
Output Power:	30dBm min.
Spurious:	-60dBc max.
Input Power:	+15dBm max.
Input VSWR:	2 typ.
Voltage:	220V AC
Impedance:	50Ω
Protection Function:	With reflected standing wave protection function.

Mechanical

Size:	481.8*500*44.3mm
	18.969*19.685*1.744in
RF Connectors:	2.4mm

Environmental


Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

How To Order

NPAS-24000-43000-30-30S

Customization is available upon request.

Outline Drawings

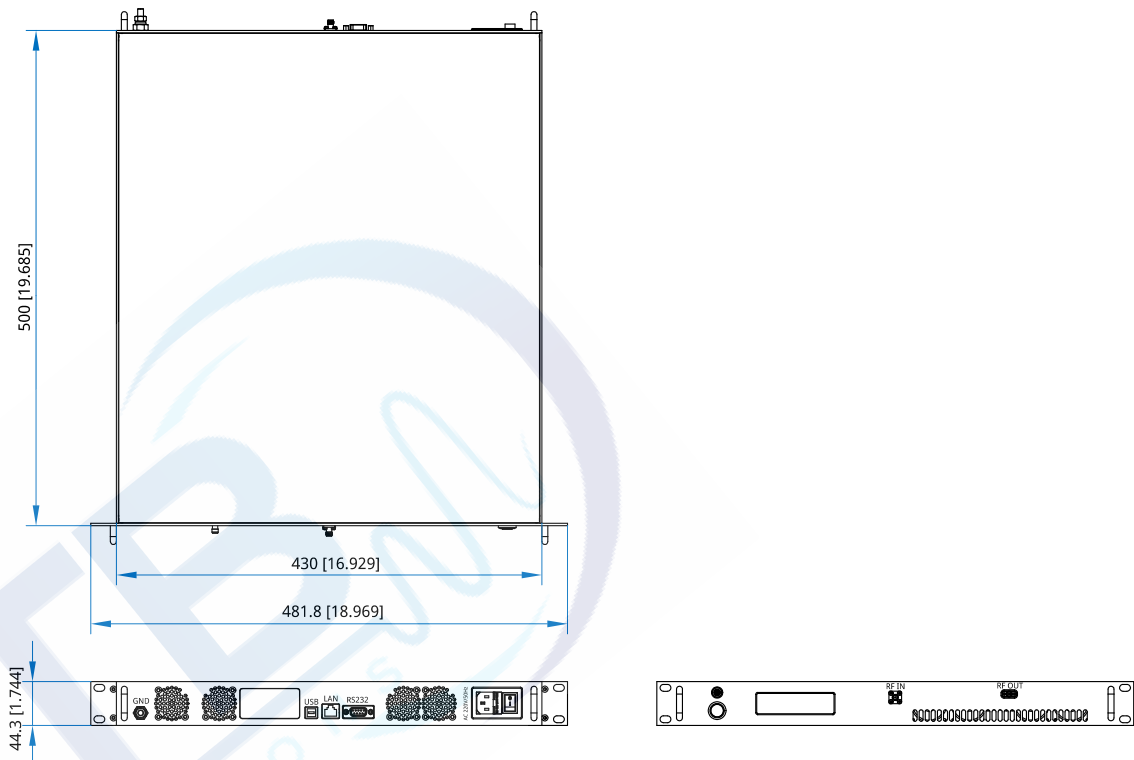

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]