

NPAS-500-2700-47-47S

500~2700MHz, 47dB, 47dBm

- Features:

 - * Small Size
 - * Low Power Consumption
- Applications:

 - * Wireless
 - * Transmitter
 - * Laboratory Test

Electrical

Frequency:	500~2700MHz
Gain:	47dB min.
Gain Flatness:	4±1dB max.
Input VSWR:	2 max.
Output Power (Psat):	47dBm min.
Input Power:	+10dBm max.
Spurious:	-65dBc max.
Harmonic:	-10dBc max.
Voltage:	220V DC
PTT:	Default closed, Keys open
Impedance:	50Ω

Mechanical


Size*1:	458*420*118mm
	18.032*16.535*4.646in
RF Connectors:	N Female

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+55°C
------------------------	-----------

Outline Drawings

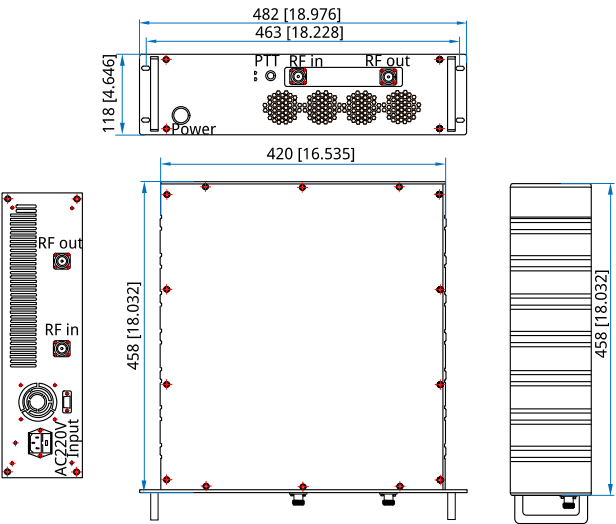

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

NPAS-500-2700-47-47S

Customization is available upon request.