

NPA-26000-40000-30-30S

26~40GHz, 30dB, 30dBm

Power Amplifier

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	26~40GHz
Gain:	30dB min.
Gain Flatness:	±4dB typ.
Output Power (Psat):	30dBm min.
Spurious:	-60dBc max.
Harmonic:	-18dBc typ.
VSWR:	2.5 typ.
Voltage:	+8V DC
Current:	3A typ.
Input Power:	+10dBm max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	61*45*15mm 2.402*1.772*0.591in
Weight:	300g max.
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+60°C
Non-operating Temperature:	-45~+85°C

Outline Drawings

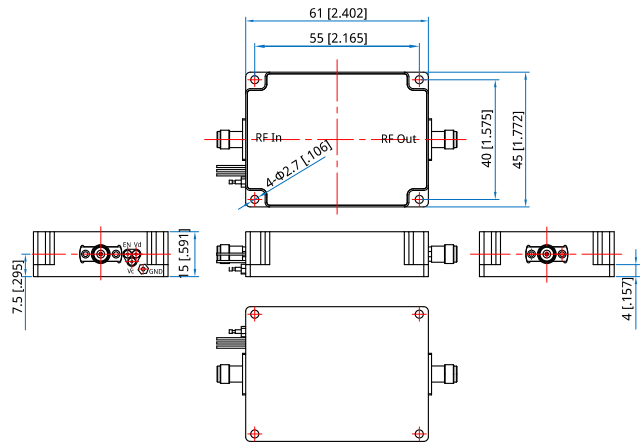

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NPA-26000-40000-30-30S

Customization is available upon request.

