

NPA-2620-2690-45-40

2620~2690MHz, 45dB, 40dBm

Power Amplifier

Features:

- * Small Size
- * Low Power Consumption


Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	2620~2690MHz
Power Gain:	45dB typ.
Gain Flatness:	±0.75dB typ.
Output Power (P1dB):	40dBm typ.
Spurious:	-60dBc typ. (DC~10GHz@Pout=40dBm)
2 th Harmonic:	-45dBc typ.
Input VSWR:	1.45 typ.
Output VSWR:	2 typ.
Voltage:	+30V DC
Input Power:	-2dBm max.

Outline Drawings

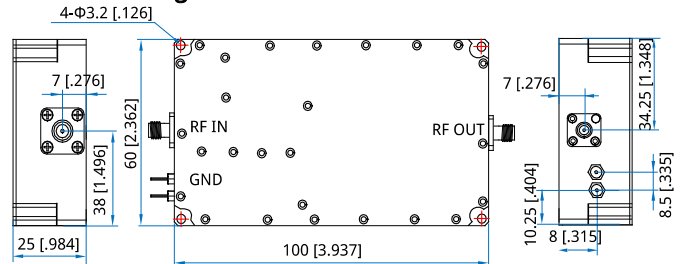

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

Mechanical

Size*1:	100*60*25mm 3.937*2.362*0.984in
RF Connectors:	SMA female
Power Supply Interface:	Feed through
Mounting:	4-Φ3.2mm through-hole
Cooling:	Forced Air

[1] Exclude connectors.

How To Order

NPA-2620-2690-45-40

Customization is available upon request.

Environmental

Operating Temperature: -10~+50°C

