

NPA-26500-40000-18-23

26.5~40GHz, 18dB, 23dBm

- | | |
|-------------------------|-------------------|
| Features: | Applications: |
| * Small Size | * Wireless |
| * Low Power Consumption | * Transmitter |
| | * Laboratory Test |

Electrical

Frequency:	26.5~40GHz
Gain:	18dB min.
Gain Flatness:	±1.5dB typ.
Output Power (P1dB):	23dBm min.
Harmonic:	-15dBc typ.
Spurious:	-60dBc max.
VSWR:	1.8 typ.
Voltage:	+6V DC
Current:	0.5A typ.
Input Power Without Damage:	15dBm max.

Mechanical


Size ^{*1} :	60*40*15mm 2.362*1.575*0.591in
Weight:	300g
RF Connectors:	2.92mm Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Aluminum
Mounting:	4-Φ3.2mm through-hole
Cooling:	External Heatsink (supplied on request only)

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

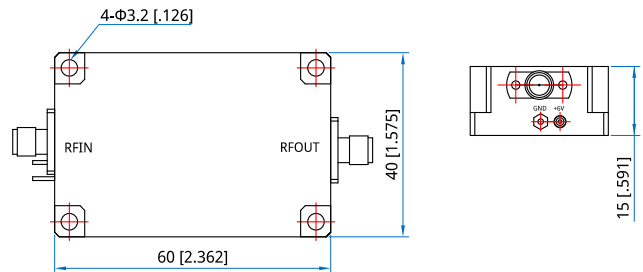

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

[NPA-26500-40000-18-23](#)

Customization is available upon request.