

NPA-5-500-46-37S

5~500MHz, 46dB, 37dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	5~500MHz
Gain:	46dB min.
Gain Flatness:	±2dB typ.
Input VSWR:	2 typ.
Output Power (Psat):	37dBm min.
Input Power:	10dBm max.
Impedance:	50Ω
Voltage:	+24~28V DC

Mechanical


Size*1:	116*49*25mm 4.567*1.929*1.984in
RF Connectors:	SMA Female

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-45~+85°C

Outline Drawings

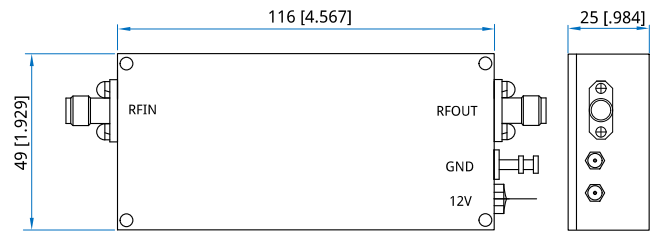

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order [NPA-5-500-46-37S](#)

Customization is available upon request.