

NPA-750-6000-35-35

0.75~6GHz, 35dB, 35dBm

Features:

- * Small Size
- * Low Power Consumption

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test

Electrical

Frequency:	0.75~6GHz
Gain:	35dB min.
Gain Flatness:	±3.5dB typ.
Output Power (Psat):	39dBm min.
Output Power (P1dB):	35dBm typ.
Spurious:	-60dBc max.
VSWR:	2 typ.
Voltage:	+50V DC
Current:	1000mA typ.
Input Power:	+10dBm max.
Impedance:	50Ω

Mechanical


Size*1:	61*45*15mm 2.402*1.772*0.591in
Weight:	300g max.
RF Connectors:	SMA Female
Mounting:	4-Φ2.7mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

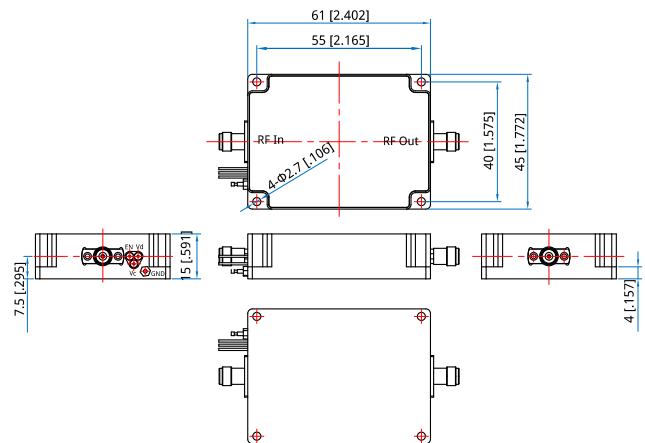

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NPA-750-6000-35-35

Customization is available upon request.