

NPA-791-821-45-40

791~821MHz, 45dB, 40dBm

Features: * Small Size

* Low Power Consumption

Applications:

- * Wireless * Transmitter
- * Laboratory Test

Electrical

Frequency: 791~821MHz Power Gain: 45dB typ.

Gain Flatness: ±0.5dB typ.
Output Power (P1dB): 40dBm typ.

Spurious: -60dBc typ.

(DC~10GHz@Pout=40dBm)

2th Harmonic: -30dBc typ.
Input VSWR: 1.45 typ.
Output VSWR: 2 typ.
Voltage: +30V DC

Input Power: -2dBm max.

Mechanical

Size*1: 100*60*25mm

3.937*2.362*0.984in

RF Connectors: SMA female
Power Supply Interface: Feed through

Mounting: 4-Φ3.2mm through-hole

Cooling: Forced Air


[1] Exclude connectors.

Environmental

Operating Temperature: -10~+50°C

Power Amplifier

Outline Drawings

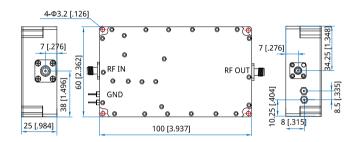

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NPA-791-821-45-40

Customization is available upon request.