

NSDC-0.01-250-K6-50-NS

0.01~250MHz, 600W, 50dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.01~250MHz
Insertion Loss:	0.4dB max.
Coupling:	50±1dB
Coupling Flatness:	±0.75dB max.
Directivity:	20dB min.
VSWR:	1.25 max.
Average Power:	600W

Mechanical


Size*1:	256.4*52*80mm 10.094*2.047*3.15in
Connectors:	N Female, SMA Female
Mounting:	4-M3, depth 10mm

[1] Exclude connectors and terminations.

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

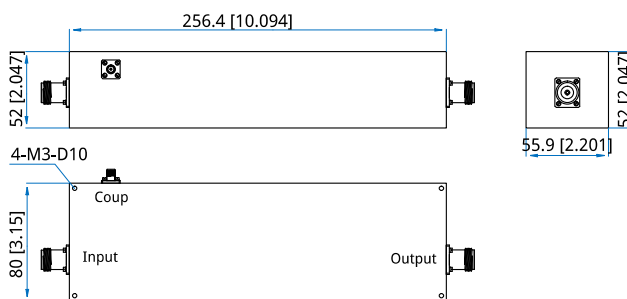

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

NSDC-0.01-250-K6-50-NS

Customization is available upon request.