

NSDC-10750-12750-50-30-S

10.75~12.75GHz, 50W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	10.75~12.75GHz
Insertion Loss:	0.5dB max.
Coupling:	30±1.0dB
Coupling Flatness:	±1.0dB max.
VSWR:	1.4 max.
Directivity:	15dB min.
Impedance:	50Ω
Average Power:	50W

Mechanical


Size*1:	33*15*11mm 1.3*0.59*0.43in
Connectors:	SMA Female
Mounting:	2-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

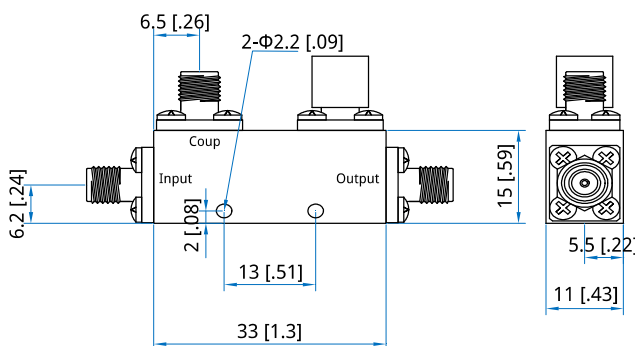

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

NSDC-10750-12750-50-30-S

Customization is available upon request.