

NSDC-130-470-50-6-S

0.13~0.47GHz, 50W, 6dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.13~0.47GHz
Insertion Loss:	0.7dB max.
VSWR:	1.25 max.
Directivity:	20dB min.
Coupling:	6±1.2dB
Coupling Flatness:	±1.2dB max.
Impedance:	50Ω
Average Power:	50W

Mechanical


Size*1:	412*15*11mm 4.45*0.67*0.5in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings

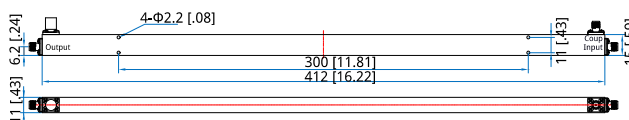

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

NSDC-130-470-50-6-S

Customization is available upon request.