

NSDC-2000-18000-30-10-S

2~18GHz, 30W, 10dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	2~18GHz
Insertion Loss:	1.0dB max.
Coupling:	10±1.0dB
Directivity:	12dB min.
min.VSWR:	1.6 max.
Impedance:	50Ω
Average Power:	30W

Mechanical

Size*1:	43*15*11mm 1.693*0.591*0.433in
Connectors:	SMA Female
Mounting:	3-Φ2.2mm through-hole 4-M2, depth 5mm

[1] Exclude connectors and terminations.

Outline Drawings

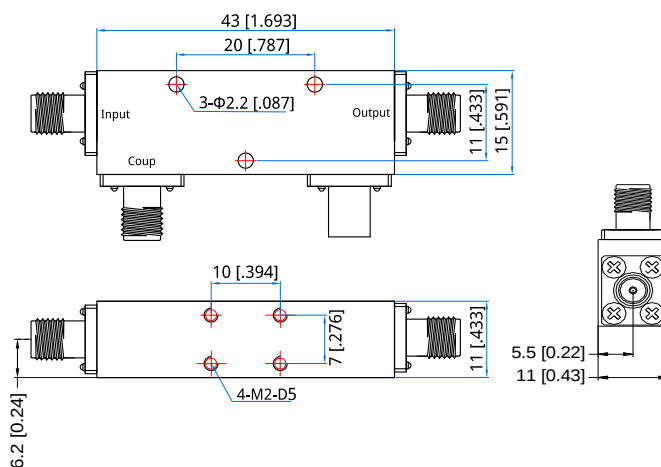

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NSDC-2000-18000-30-6-S

Customization is available upon request.

NSDC-2000-18000-30-10-S

2~18GHz, 30W, 10dB

