

NSDC-500-18000-20-20-S

0.5~18GHz, 20W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~18GHz
Insertion Loss:	2dB max.
Coupling:	20±1.5dB
Coupling Flatness:	±1.5dB max.
Directivity:	10dB min.
VSWR:	1.7 max.
Average Power:	20W max.

Mechanical


Size*1:	115*16*11mm 4.528*0.630*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings

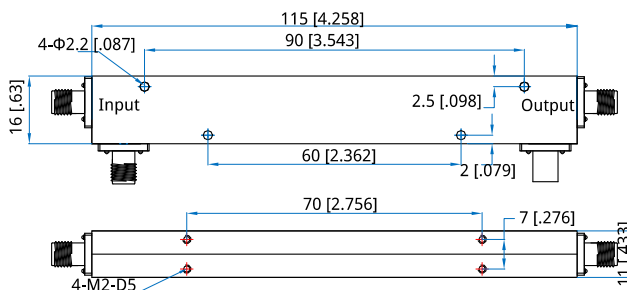

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

NSDC-500-18000-20-20-S

Customization is available upon request.