

NSDC-500-18000-50-20-N

0.5~18GHz, 50W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.5~18GHz
Insertion Loss:	1.0dB max.
Coupling:	20±0.6dB
Coupling Flatness:	±0.7dB max.
Directivity:	15dB min.
VSWR:	1.4 max.
Average Power:	50W max.

Mechanical

Size*1:	116.5*17.5*23mm 4.587*.689*.906in
Connectors:	N Female
Mounting:	2-Φ3.6mm through-hole 8-M2.5*5mm

[1] Exclude connectors and terminations.

Outline Drawings

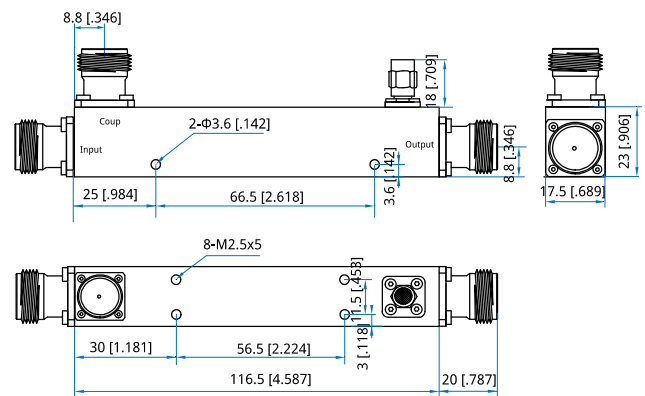

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

NSDC-500-18000-50-20-N

Customization is available upon request.