

NSDC-6500-11500-20-20-S

6.5~11.5GHz, 20W, 20dB

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	6.5~11.5GHz
Insertion Loss:	1dB max.
Coupling:	20±1dB
Directivity:	12dB min.
VSWR:	1.5 max.
Average Power:	20W

Mechanical

Size*1:	33*15*11mm 1.299*0.591*0.433in
Connectors:	SMA Female
Mounting:	2-Φ2.2mm through-hole 2-M2, depth 5mm

[1] Exclude connectors and terminations.

Outline Drawings

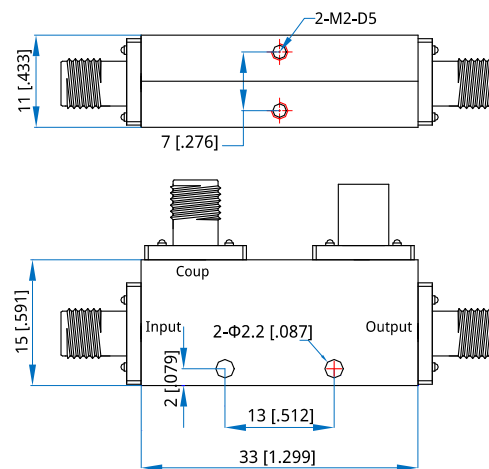

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NSDC-6500-115000-20-20-S

Customization is available upon request.