

NSDC-700-6000-50-20-N

0.7~6GHz, 50W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.7~6GHz
Insertion Loss:	0.7dB max.
VSWR:	1.3 max.
Directivity:	16dB min.
Coupling:	20±1dB
Coupling Flatness:	±1.0dB max.
Impedance:	50Ω
Average Power:	50W

Mechanical


Size*1:	125*20*20mm 4.93*0.79*0.79in
Connectors:	N Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-45~+85°C
--------------	-----------

Outline Drawings

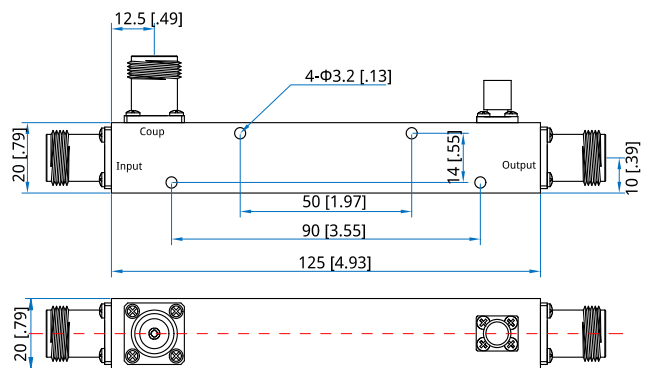

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

NSDC-700-6000-50-20-N

Customization is available upon request.