

NRHA15

49.8~75.8GHz, WR-15

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency:	49.8~75.8GHz
Gain:	10, 15, 20, 25dB min.
VSWR:	1.2 max.(Outline A, B, C, D) 1.5 max.


Mechanical


Interface:	WR-15 (BJ620)
Flange:	UG385/U
Material:	Brass

Environmental

Temperature: -55~+165°C

Outline Drawings

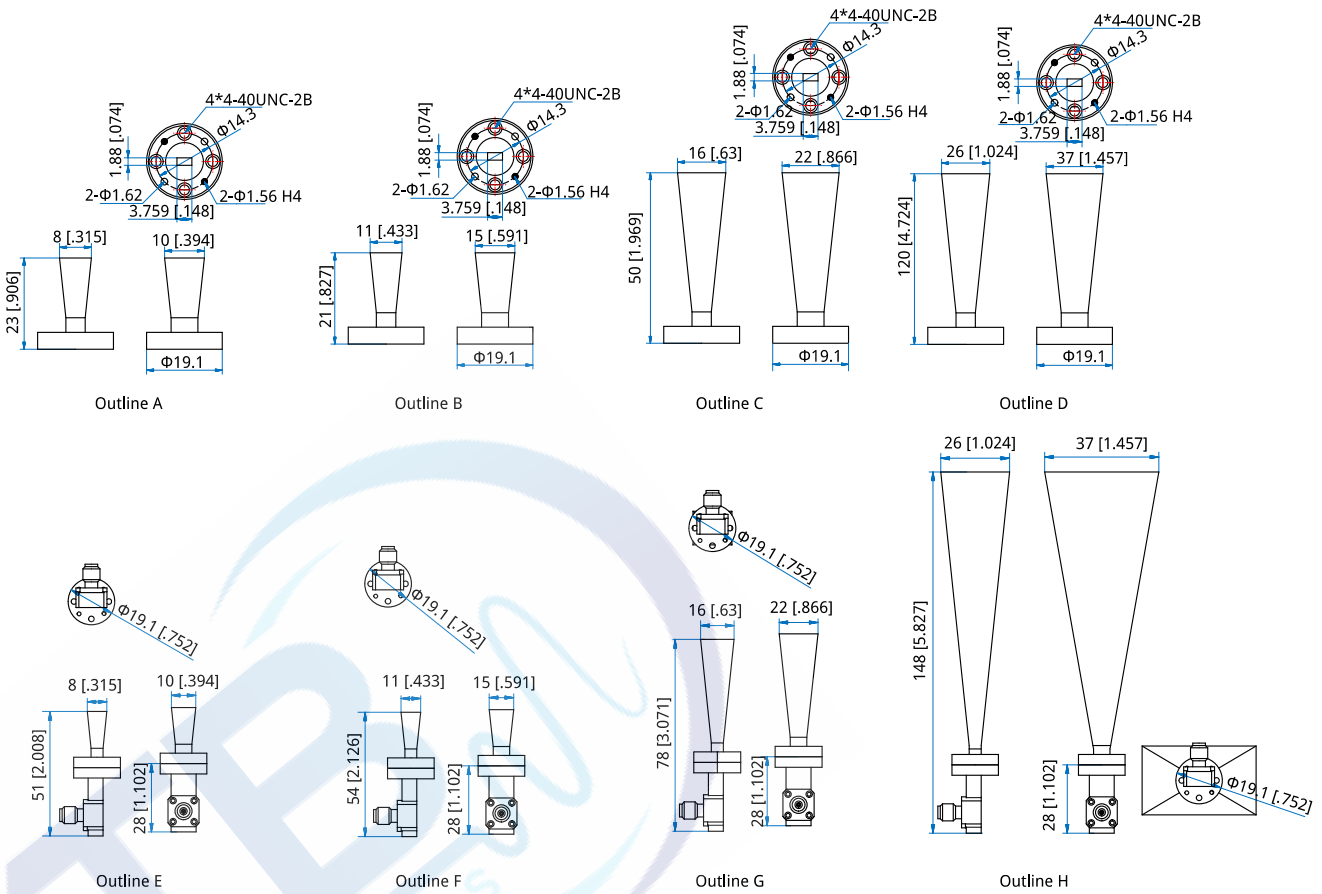

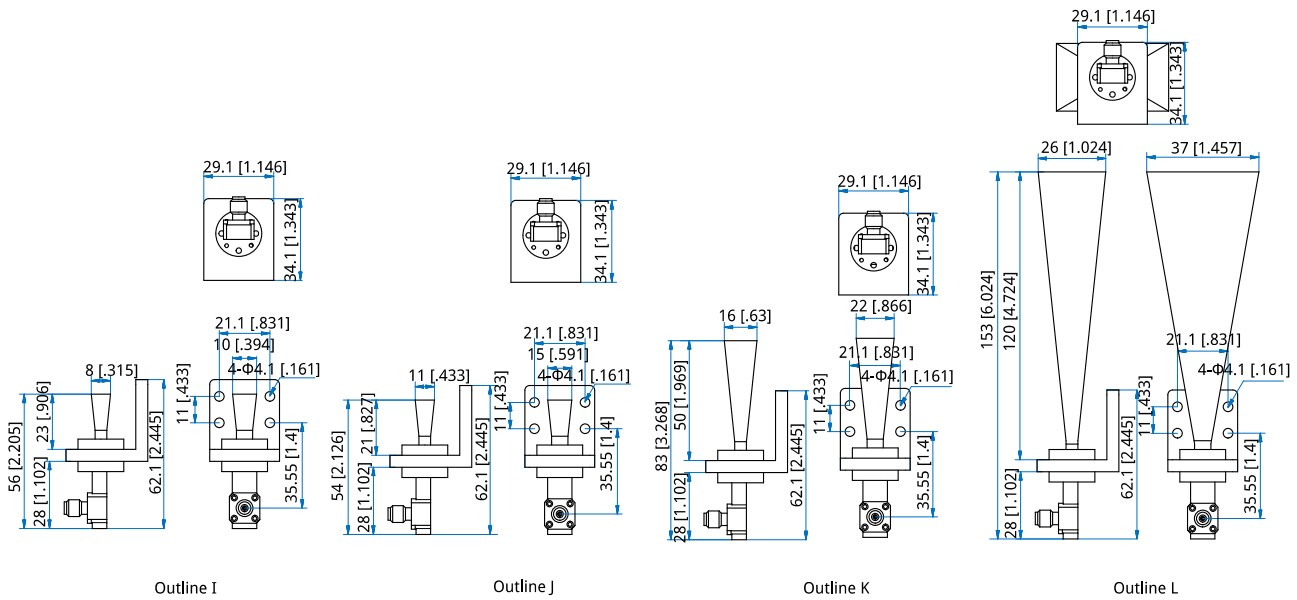

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

NRHA15-X-Y-Z

X: Gain in dB

10dB - Outline A, E, I

15dB - Outline B, F, J

20dB - Outline C, G, K

25dB - Outline D, H, L

Y: Connector type if applicable

Z: Installation method if applicable

Connector naming rules:

V - 1.85mm Female (Outline E, F, G, H, I, J, K, L)

Panel Mount naming rules:

P - Panel Mount (Outline I, J, K, L)

Examples:

To order an antenna, 49.8–75.8GHz, 15dB, WR-15, 1.85mm female, Panel Mount, specify NRHA15-15-V-P.

Customization is available upon request.