

NRHA510

1.45~2.2GHz, WR-510

Features:

- * Broadband

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Broadcast

Electrical

Frequency:	1.45~2.2GHz
Gain:	15dB
VSWR:	1.4 max.


Mechanical

Interface:	WR-510 (BJ18)
Flange:	FDP18
Material:	Aluminium

Environmental

Temperature: -55~+165°C

Outline Drawings

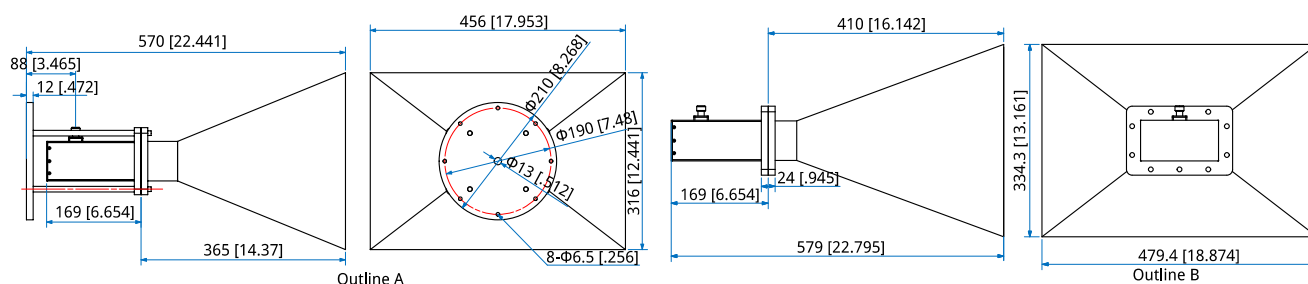

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]

How To Order

NRHA510-X-Y-Z

X: Gain in dB

15dB - Outline A, B

Y: Connector type if applicable

Z: Installation method if applicable

Connector naming rules:

N - N Female (Outline A, B)

S - SMA Female

Pannel Mount naming rules:

P - Pannel Mount (Outline A)

Examples:

To order an antenna, 1.45-2.2GHz, 15dB, WR-510, N Female, Pannel Mount, specify NRHA510-15-N-P.

Customization is available upon request.