

## NVLC-1F-1

1mm, DC~110GHz

**Features:**

- \* Low VSWR
- \* No welding
- \* Reusable
- \* Easy installation

**Applications:**

- \* Laboratory Test

**Electrical**

---

Frequency:	DC~110GHz
VSWR:	1.5 max.
Impedance:	50Ω

**Mechanical**

---


RF Conductor:	1.0mm Female
Inner Conductor:	Gold plated beryllium copper
Outer Conductor:	SUS303 stainless steel

**How To Order**

**NVLC-1F-1**

Customization is available upon request.

**Outline Drawings**

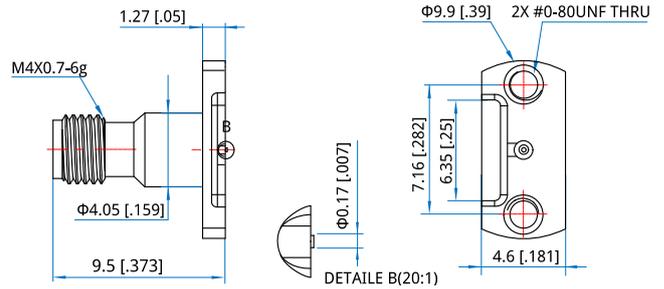

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

