

## NVLC-VF-1

1.85mm, DC~65GHz

**Features:**

- \* Low VSWR
- \* No welding
- \* Reusable
- \* Easy installation

**Applications:**

- \* Laboratory Test

**Electrical**

Frequency: DC~65GHz  
 VSWR: 1.4 max.  
 Impedance: 50Ω

**Mechanical**

RF Conductor: 1.85mm Female  
 Inner Conductor: Gold plated beryllium copper  
 Outer Conductor: SUS303 stainless steel

**Environmental**


Temperature: -55~+165°C

**How To Order**

**NVLC-VF-1**

Customization is available upon request.

**Outline Drawings**

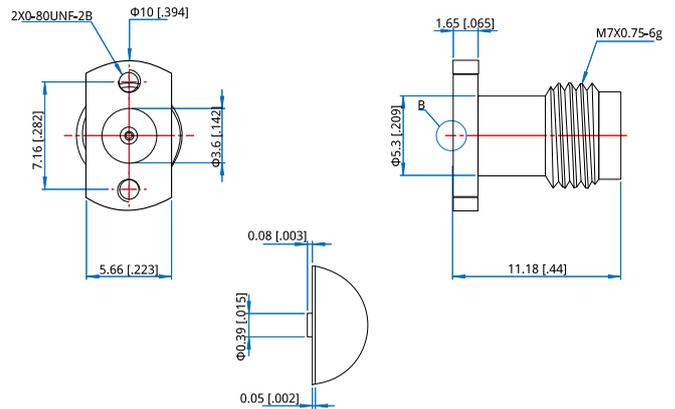

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

