

NWCA-102-SF-R

WR-102 to SMA female, Right angle

Waveguide to Coax Adapter

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 7~11GHz
VSWR: 1.3 max.
Insertion Loss: 0.3dB max.

Mechanical


RF Connectors: SMA Female
Interface: WR-102
Flange: Custom
Material: Aluminum

How To Order

NWCA-102-SF-R

Customization is available upon request.

Outline Drawings

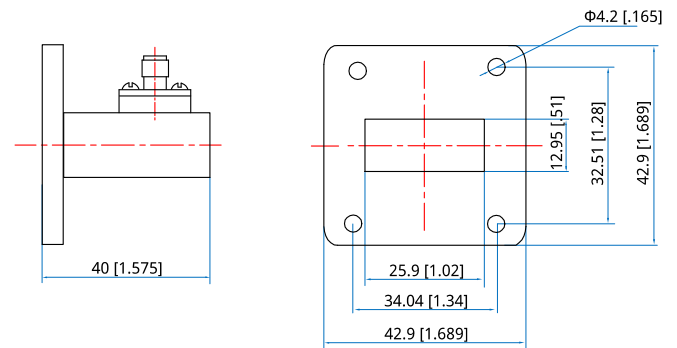

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]