

NWCA-112-SF-E WR-112 to SMA female, End launch

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 6.57-9.99GHz
VSWR: 1.2 max.
Impedance: 50Ω

How To Order


NWCA-112-SF-E-B - Outline A
NWCA-112-SF-E-D - Outline B

Mechanical


Length: 60mm
2.362in
RF Connectors: SMA Female
Interface: WR-112
Flange: FBP84 or FDP84
Material: Aluminium

Customization is available upon request.

Outline Drawings

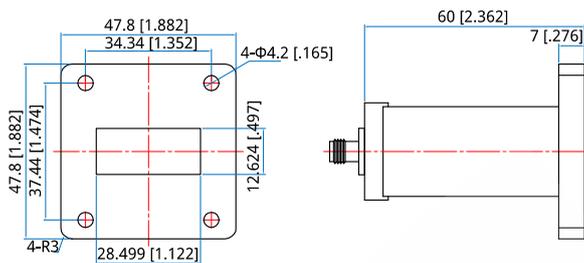

Outline A

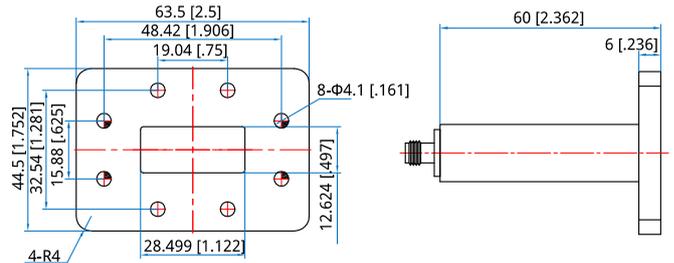

Outline B

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]