

NWCA -2100-NF -R WR-2100 to N female, Right angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 0.35-0.53GHz
VSWR: 1.2 max.
Impedance: 50Ω

How To Order


NWCA-2100-NF-R

Customization is available upon request.

Mechanical

Length: 350mm
13.78in
RF Connectors: N Female
Interface: WR-2100
Flange: FDP4
Material: Aluminium

Outline Drawings

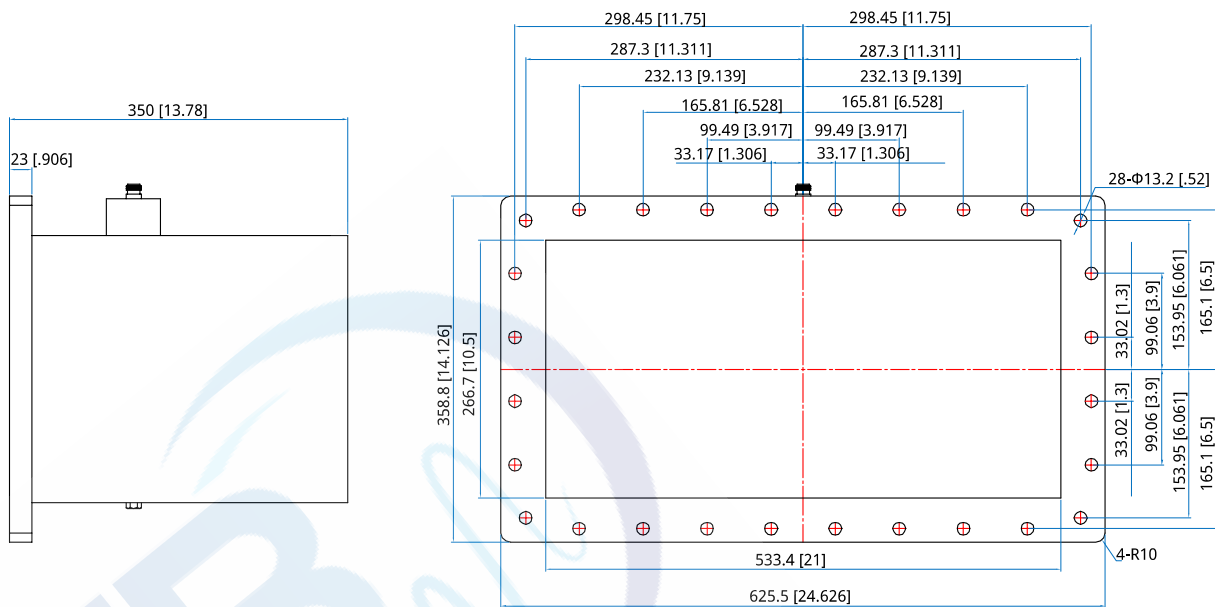

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]