

NWCA -22-2 WR-22 to 2.4mm

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar


Electrical

Frequency:	40~50GHz
VSWR:	1.35 max.
Insertion Loss:	0.45dB max.
Impedance:	50Ω

Mechanical

RF Connectors:	2.4mm
Interface:	WR-22
Flange:	UG-383/U
Outer Conductor:	Passivated stainless steel & gold plated brass
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper

Outline Drawings

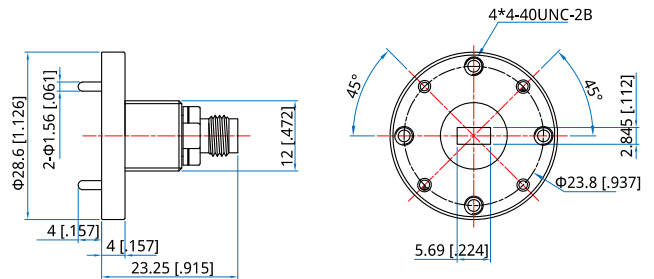

Outline A

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NWCA-22-X-Y

X: Connector type.

Y: End launch: E, Right angle: R.

End launch - Outline A

Connector naming rules:

2F - 2.4mm Female - Outline A

2 - 2.4mm Male

Customization is available upon request.