

NWCA-284-SF-R

WR-284 to SMA female, Right angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 2.6~3.95GHz
VSWR: 1.2 max.
Impedance: 50Ω

How To Order


NWCA-284-SF-R

Customization is available upon request.

Mechanical

Length: 75mm
2.953in
RF Connectors: SMA Female
Interface: WR-284
Flange: FDP32
Material: Aluminium

Outline Drawings

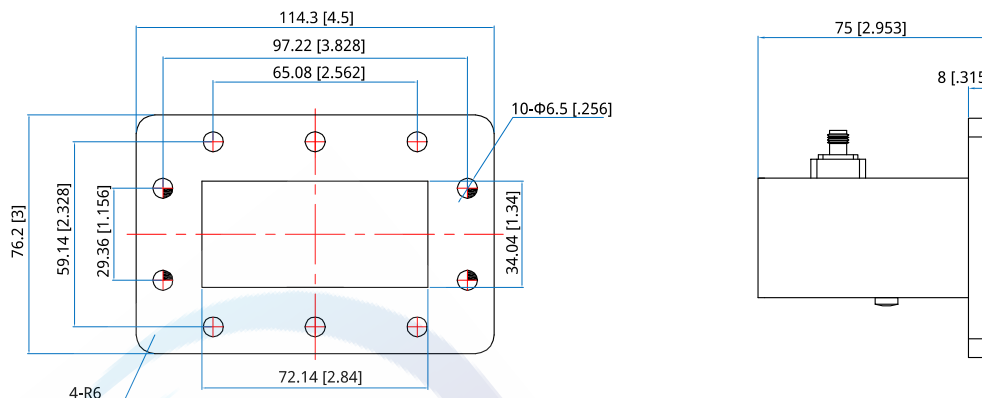

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]