

## Waveguide to Coax Adapter

# NWCA -' ( -2-R WR-34 to 2.4mm Male, Right angle

Features: \* Low VSWR

Applications: \* Wireless

\* Transmitter \* Laboratory Test

\* Radar

#### **Electrical**

Frequency: 21.7~33GHz VSWR: 1.2 max.

Impedance: 50Ω

#### Mechanical

Length: 30mm

1.181in

RF Connectors: 2.4mm male


Interface: WR-34 Flange: FBP260 Material: Copper

#### **How To Order**

NWCA-34-2-R

Customization is available upon request.

### **Outline Drawings**

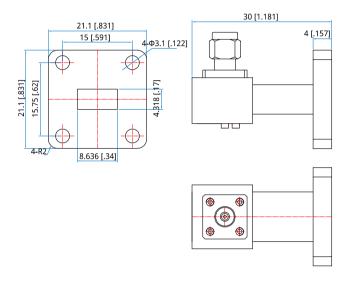

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]