

NWCA-' (-? F-R)
WR-34 to 2.92mm Female, Right angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 21.7~33GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical


Length: 30mm
1.181in
RF Connectors: 2.92mm Female
Interface: WR-34
Flange: FBP260
Material: Copper

How To Order

NWCA-34-KF-R

Customization is available upon request.

Outline Drawings

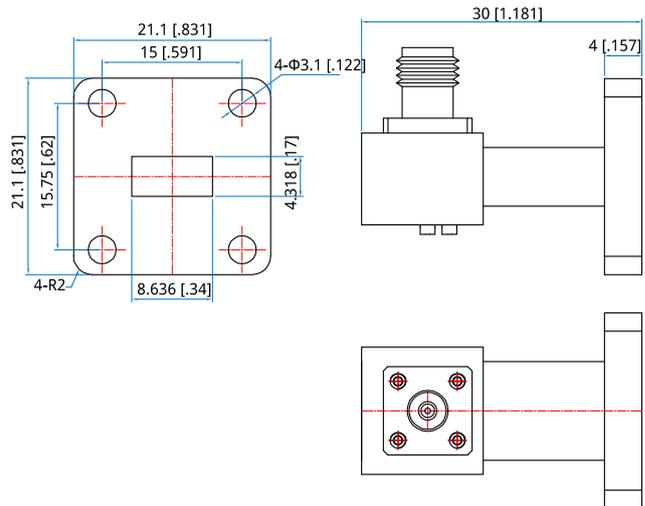

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

