

NWCA-340-7F-R

WR-340 to 7/16 DIN Female, Right angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar


Electrical

Frequency: 2.17~3.3GHz
VSWR: 1.25 max.
Insertion Loss: 0.2dB max.
Average Power: 200W

Mechanical

Length: 100mm
3.937in
RF Connectors: 7/16 DIN Female
Interface: WR-340
Flange: FDP26
Material: Aluminum

Outline Drawings

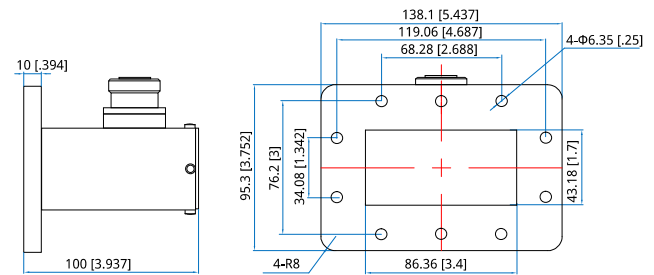

Unit: mm [in]
Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

NWCA-340-7F-R

Customization is available upon request.