

## NWCA -' ( O-SF -E WR-340 to SMA female, End launch

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 2.17~3.3GHz  
VSWR: 1.2 max.  
Impedance: 50Ω

### How To Order


**NWCA-340-SF-E**

Customization is available upon request.

### Mechanical

Length: 90mm  
3.543in  
RF Connectors: SMA Female  
Interface: WR-340  
Flange: FDP26  
Material: Aluminium

### Outline Drawings

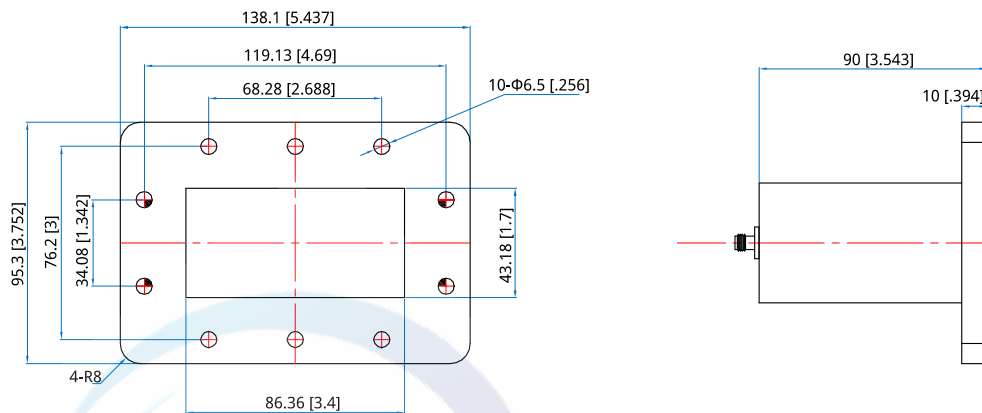

Unit: mm [in]      Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]