

NWCA-( ' O-+F -E  
WR-430 to 7/16 DIN female, End launch

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

**Electrical**

Frequency: 1.72~2.61GHz  
VSWR: 1.2 max.  
Impedance: 50Ω

**How To Order**


**NWCA-430-7F-E**

Customization is available upon request.

**Mechanical**

Length: 110mm  
4.331in  
RF Connectors: 7/16 DIN Female  
Interface: WR-430  
Flange: FDP22  
Material: Aluminium

**Outline Drawings**

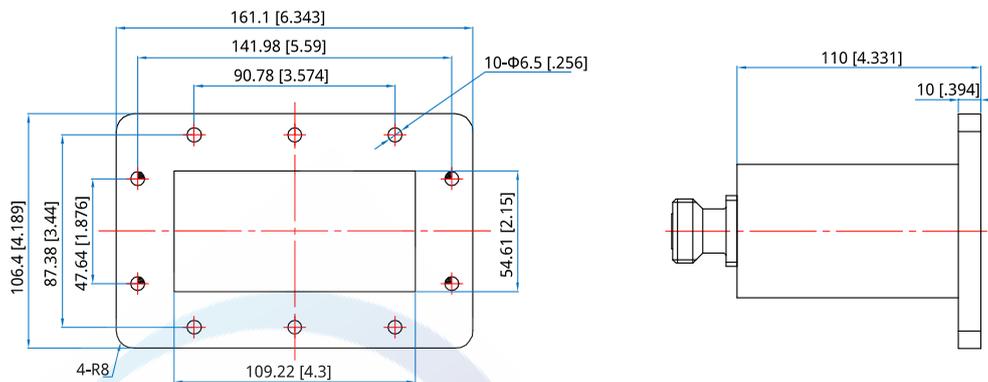

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]