

NWCA-430-7F-R

WR-430 to 7/16 DIN female, Right angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 1.72~2.61GHz
VSWR: 1.2 max.
Impedance: 50Ω

How To Order


NWCA-430-7F-R

Customization is available upon request.

Mechanical

Length: 95mm
3.74in
RF Connectors: 7/16 DIN Female
Interface: WR-430
Flange: FDP22
Material: Aluminium

Outline Drawings

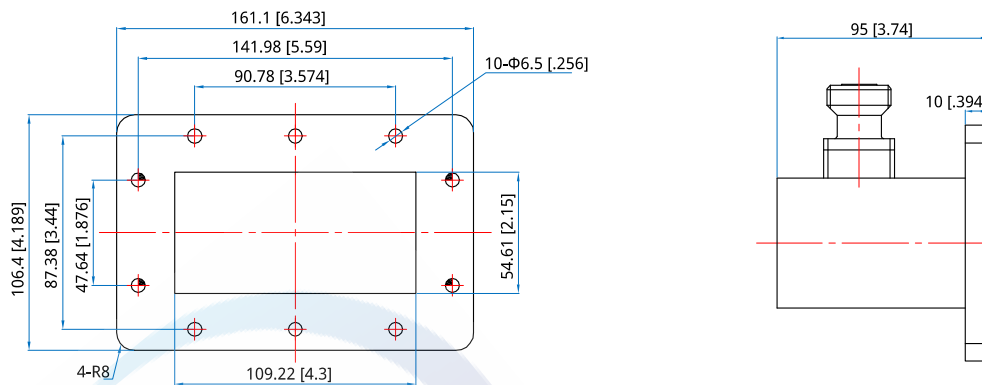

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]