

NWCA -510--F -E
 WR-510 to 7/16 DIN female, End launch

Features:
 * Low VSWR

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: 1.45–2.2GHz
 VSWR: 1.2 max.
 Impedance: 50Ω

How To Order


NWCA-510-7F-E

Customization is available upon request.

Mechanical

Length: 150mm
 5.906in
 RF Connectors: 7/16 DIN Female
 Interface: WR-510
 Flange: FDP18
 Material: Aluminium

Outline Drawings

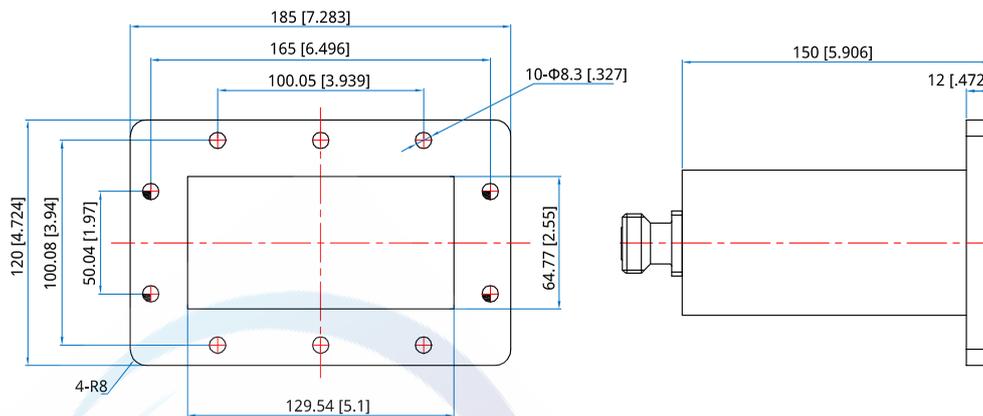

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]