

NWCA -+5-SF -R WR-75 to SMA Female, Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 9.84~15GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical


Length: 35mm
1.378in
RF Connectors: SMA Female
Interface: WR-75
Flange: FBP120
Material: Aluminium

How To Order

NWCA-75-SF-R

Customization is available upon request.

Outline Drawings

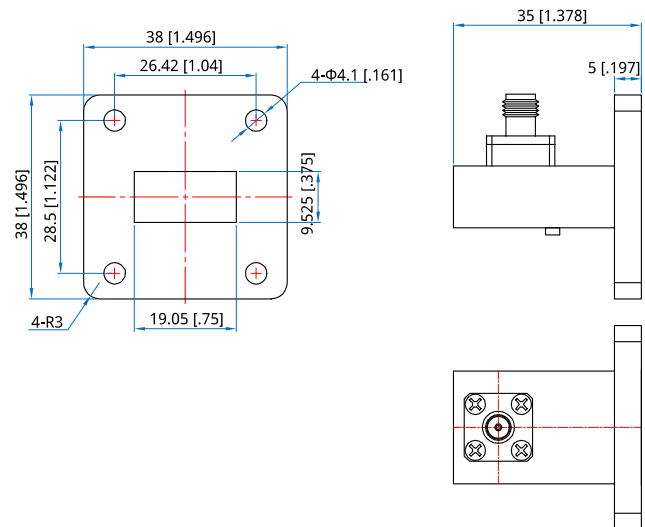

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]