

Waveguide to Coax Adapter

NWCA -+ +O-NF -R WR-770 to N female, Right angle

Features: * Low VSWR Applications: * Wireless * Transmitter * Laboratory Test

* Radar

Electrical

Frequency: 0.96~1.46GHz VSWR: 1.2 max. Impedance: 50Ω


How To Order NWCA-770-NF-R


Customization is available upon request.

Mechanical

Length:	160mm
	6.299in
RF Connectors:	N Female
Interface:	WR-770
Flange:	FDP12
Material:	Aluminium

Outline Drawings

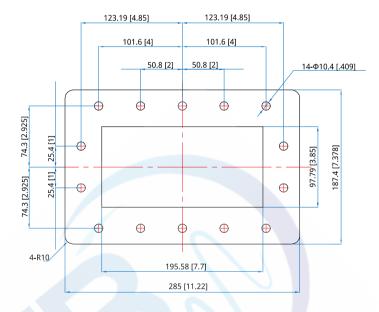



Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]