

## NWCA -85, 0-SF -R WRD-580 to SMA Female, Right angle

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 5.8~16GHz  
VSWR: 1.3 max.  
Impedance: 50Ω

### Mechanical


Length: 40mm  
1.575in  
RF Connectors: SMA female  
Interface: WRD-580  
Flange: FPWRD580  
Material: Aluminium

### How To Order

**NWCA-D580-SF-R**

Customization is available upon request.

### Outline Drawings

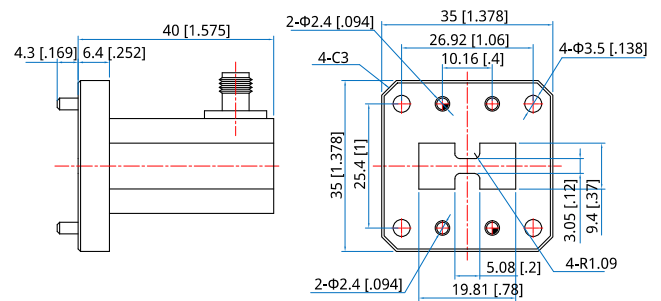

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

