

NWCA -8 * 50-SF -R WRD-650 to SMA Female, Right angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 6.5~18GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical


Length: 45mm
1.772in
RF Connectors: SMA female
Interface: WRD-650
Flange: FPWRD650
Material: Aluminium

How To Order

NWCA-D650-SF-R

Customization is available upon request.

Outline Drawings

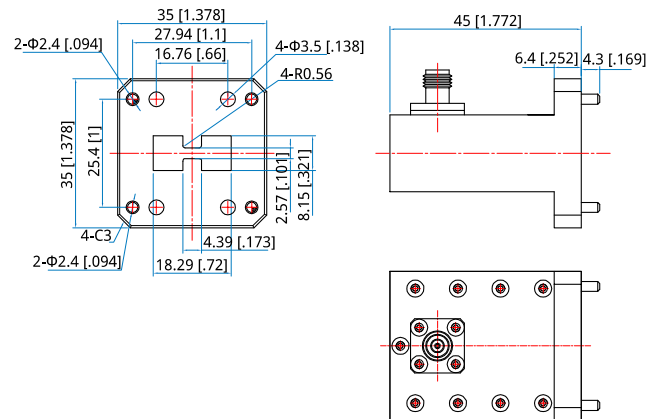

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]