



## 2-Way Resistive Power Divider

### NPD2-0-67000-R5-V

DC~67GHz, 0.5W

#### Features:

- \* Small Size
- \* Low Insertion Loss

#### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

#### Electrical

Frequency:	DC~67GHz
Insertion Loss:	7.8dB max.
VSWR:	2 max.
Isolation:	7.8dB min.
Amplitude Balance:	±0.8dB
Phase Balance:	±7°
Average Power:	0.5W

#### Mechanical


Size*1:	16.5*15.5*10.5mm 0.65*0.61*0.413in
Connectors:	1.85mm Female

[1] Exclude connectors.

#### Environmental

Operation Temperature:	-20~+55°C
------------------------	-----------

#### Outline Drawings

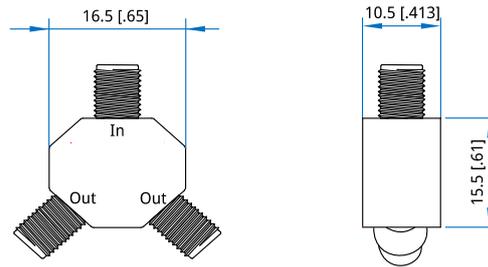

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

#### How To Order

**NPD2-0-67000-R5-V**

Customization is available upon request.

