

NCI-MYG-M51

BMA Connector, DC~6GHz

- Features:

 - * Low VSWR
- Applications:

 - * Wireless
 - * Radar
 - * Instruments
 - * Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω


Mechanical

RF Connector:	BMA male
Outer Conductor:	Passivated stainless steel
Dielectric:	PTFE
Inner Conductor:	Gold plated copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

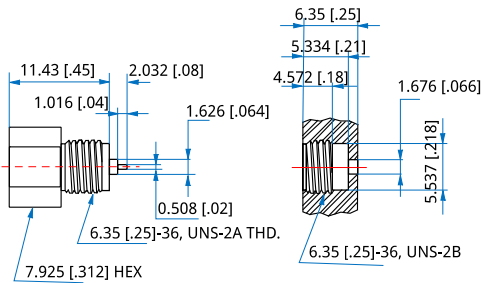

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NCI-MYG-M51

Customization is available upon request.