

NBF-24000-33000-60

24GHz~33GHz

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	24~33GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.8 max.
Stopband Attenuation:	60dBc@DC~21GHz min. 60dBc@37~40GHz min.


Mechanical

RF Connectors:	2.92mm Female
Mounting:	4*Φ2.2mm through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

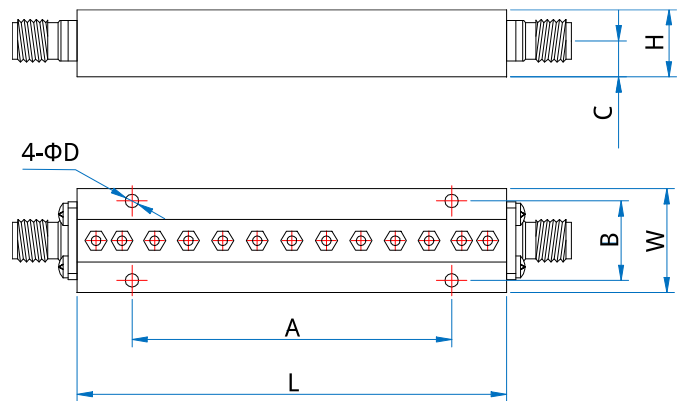

Size	L	W	H	A	B	C	D
mm	51.5	16	11	33.5	11	6.2	2.2
in	2.028	0.630	0.433	1.319	0.433	0.244	0.087

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-24000-33000-60

Customization is available upon request.