

NBF-26400-33000-60

26.4~33GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	26.4~33GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.8 max.
Stopband Attenuation:	60dB@DC~24GHz min. 60dB@37~40GHz min.
Average Power:	30W max.

Mechanical


Size*1:	59.5*16*11mm 2.343*0.63*0.433in
Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

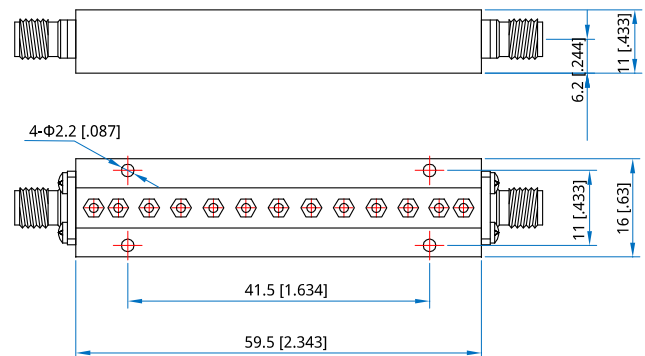

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-26400-33000-60

Customization is available upon request.