

NBF-8400-9600-30

8.4~9.6GHz, 30dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	8.4~9.6GHz
Passband Insertion Loss:	2dB max.
VSWR:	1.5 max.
Stopband Attenuation:	30dB@DC~8GHz min. 30dB@10~18GHz min.


Mechanical

RF Connectors:	SMA Female
Mounting:	4-M2 through-hole

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

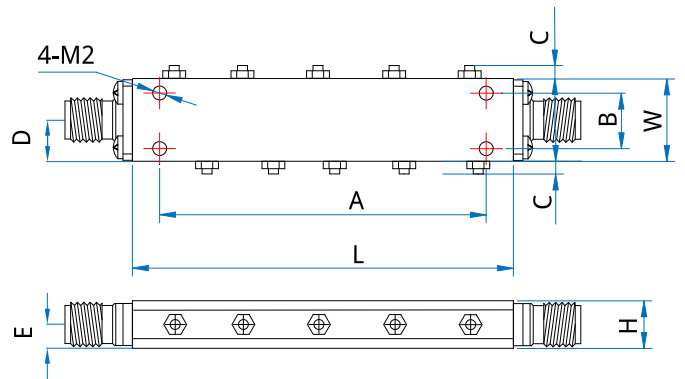

Size:	L	W	H	A	B	C	D	E
mm:	64	13	9	55.8	9.8	2	6.5	4.5
in:	2.52	0.512	0.354	2.197	0.386	0.079	0.256	0.177

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NBF-8400-9600-30

Customization is available upon request.

