

NMS6SH
DC~26.5GHz, SP3T~SP6T

Features:
* Low VSWR
* Low Insertion Loss
* High Isolation

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~26.5GHz
Impedance: 50Ω

Model	Frequency range (GHz)	Insertion Loss (dB)	Isolation (dB)	VSWR
NMS6SH-18	DC~6	0.25	80	1.20
	6~18	0.35	75	1.30
NMS6SH-26.5	DC~18	0.35	80	1.30
	18~26.5	0.50	70	1.35

Voltage*1 (V)	+12	+24	+28
Current (mA) Normally Open	300	150	140

[1] The voltage can be selected according to user requirements.

Mechanical


Size*2: 41*41*46.5mm
1.614*1.614*1.831in
Switching Sequence: Break before Make
Switching Time: 15mS max.
Operation Life: 2M Cycles
Vibration (operating): 20-2000Hz, 10G RMS
Mechanical Shock (non-operating): 30G, 1/2sine, 11mS
RF Connectors: SMA Female
Power Supply & Control Interface Connectors: D-Sub 15
Mounting: 4-Φ4.1mm through-hole

[2] Exclude connectors.

Environmental

Temperature: -25~+65°C
Extended Temperature: -45~+85°C

Outline Drawings

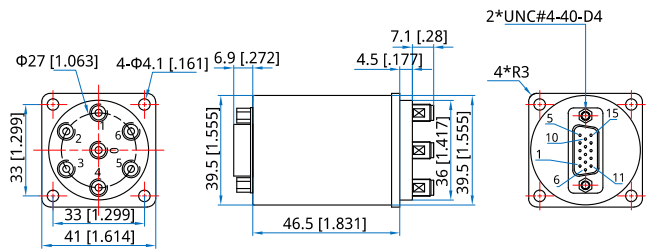

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

Additional Options

TTL: T
Indicators: I
Extended Temperature: Z
Positive Common
Waterproof Sealing Type

How To Order

NMSVSH-F-WXYZ
V: 3~6 (SP3T~SP6T)
F: Frequency in GHz
W: Actuator Type. Normally Open: 3.
X: Voltage. +12V: E, +24V: K, +28V: M.
Y: Power Interface. D-Sub: 1.
Z: Additional Options.

Examples:

To order a SP4T switch, High performance, DC-18GHz, Normally Open, +12V, D-Sub, TTL, Indicators, specify NMS4SH-18-3E1TI.

Customization is available upon request.

Pin Numbering

Normally Open

Pin	Function	Pin	Function
1~6	V1~V6	14	Indicator (Com)
7	COM	15	NC
8~13	Indicator (1~6)		


Normally Open&TTL

Pin	Function	Pin	Function
1~6	A1~A6	9~14	Indicator (1~6)
7	VDC	15	Indicator (Com)
8	COM		


Port

SP3T	1, 3, 5	SP5T	1~5
SP4T	2~3, 5~6	SP6T	1~6

Driving Schematic Diagram



Normally Open



Normally Open & TTL

