

# NFA40K1

DC~40GHz, 100W

Features:  
 \* Low VSWR  
 \* High Attenuation Flatness

Applications:  
 \* Wireless  
 \* Transmitter  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency: DC~40GHz  
 Attenuation: 10, 20, 30, 40dB  
 Impedance: 50Ω  
 Average Power\*<sup>1</sup>: 100W@25°C max.  
 Peak Power: 1KW (5μS pulse width, 10% duty cycle)

[1] Derated linearly to 10W@125°C.


### Mechanical

RF Connectors: 2.92mm  
 Connector Housing: Passivated stainless steel  
 Heat Sinks Housing: Aluminum black anodize  
 Dielectric: PEI  
 Male Inner Conductor: Gold plated brass  
 Female Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -55~+125°C

### Outline Drawings

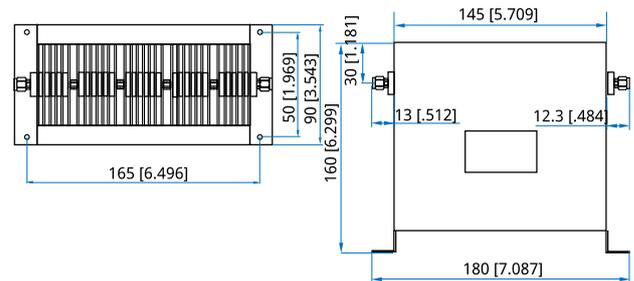

Unit: mm [in]  
 Tolerance: ±2mm [±0.08in]

### Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)				VSWR (max.)
	10	20	30	40	
DC~40	-4.0/+4.0	-4.0/+4.0	-4.0/+4.0	-4.0/+4.0	1.40

### How To Order

#### NFA40K1-X-Y-Z

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Connector naming rules:

K - 2.92mm

Examples:

To order an attenuator, DC~40GHz, 2.92mm male to 2.92mm female, 20dB attenuation, specify NFA40K1-40-20-K.