

## NLA-16000-40000-20-35

16~40GHz, 20dB, 3.5dB

Features:  
 \* Broad Band  
 \* Low Noise

Applications:  
 \* Wireless  
 \* Receiver  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency:	16~40GHz
Gain:	18dB min. 20dB typ.
Gain Flatness:	±3.5dB typ.
Output Power (P1dB):	+16dBm min.
Noise Figure:	3.5dB typ.
Spurious:	-60dBc max.
VSWR:	2 typ.
Voltage:	+5V DC
Current:	160mA typ.
Impedance:	50Ω
Input Power:	+15dBm max.

### Mechanical


Size*1:	50*30*15mm 1.969*1.181*0.591in
Weight:	200g max.
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

### Outline Drawings

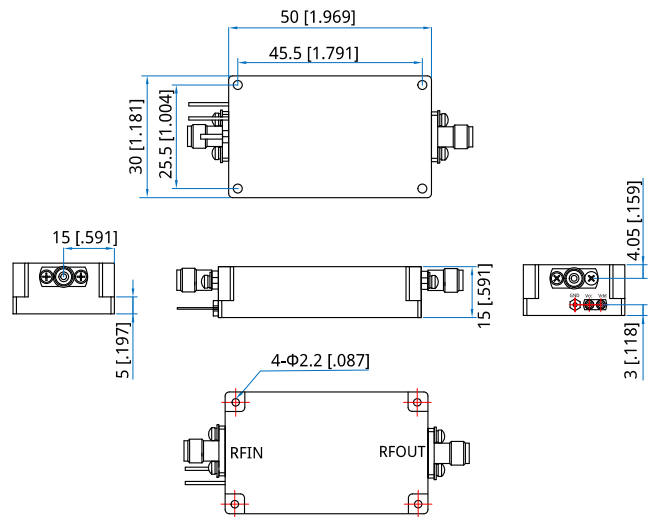

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

### How To Order

**NLA-16000-40000-20-35**

Customization is available upon request.