

NLA-18000-40000-30-50(P20)
18~40GHz, 30dB, 5dB

Features:
* Broad Band
* Low Noise

Applications:
* Wireless
* Receiver
* Laboratory Test
* Radar

Electrical

Frequency:	18~40GHz
Gain:	30dB min.
Gain Flatness:	±2.5dB typ.
Output Power (P1dB):	+20dBm typ.
Noise Figure:	5dB typ.
Spurious:	-60dBc max.
Input VSWR:	1.5 typ.
VSWR:	2.5 typ.
Voltage:	+12V DC
Current:	0.4A typ.
Impedance:	50Ω
Input Power:	+10dBm max.

Mechanical


Size*1:	50*30*15mm 1.969*1.181*0.591in
Weight:	300g max.
RF Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

Outline Drawings

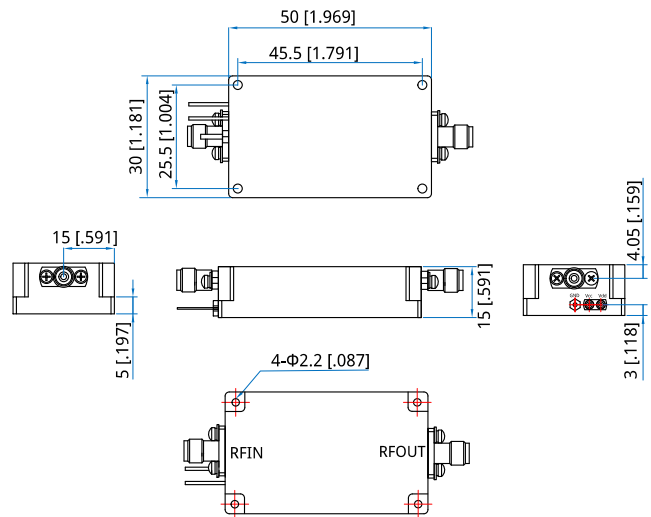

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NLA-18000-40000-30-50(P20)

Customization is available upon request.