

## NLA-50-90-15-32

50~90MHz, 15dB, 3.2dB

Features:  
 \* Broad Band  
 \* Low Noise

Applications:  
 \* Wireless  
 \* Receiver  
 \* Laboratory Test  
 \* Radar

### Electrical

Frequency:	50~90MHz
Gain:	15dB min.
Gain Flatness:	±0.2dB max.
Output Power (P1dB):	+10dBm min.
Noise Figure:	3.2dB max.
IP3:	+25dBm min.
Spurious:	-60dBc max.
VSWR:	1.5 typ.
Voltage:	+15V DC
Current:	0.04mA typ.
Impedance:	50Ω
Input Power:	+10dBm max.

### Mechanical


Size*1:	50*30*15mm 1.969*1.181*0.591in
Weight:	200g max.
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-40~+85°C

### Outline Drawings

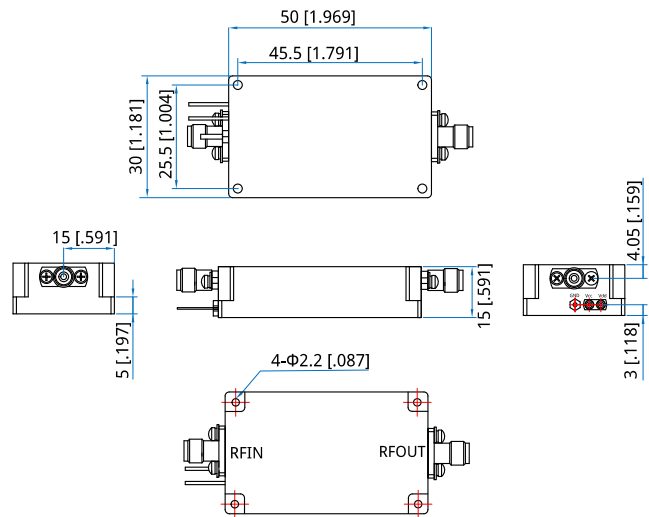

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

### How To Order

**NLA-50-90-15-32**

Customization is available upon request.